



It's Time to Launch into Space!

For years, NASA has been reusing launch components to send rockets and the Space Shuttle into space. For example, the solid rocket boosters (SRB's) on the Space Shuttle are often retrieved from the ocean, brought back to Kennedy Space Center, then cleaned and prepped for another Shuttle Launch. Why? The same reason we recycle our aluminum cans. It helps the environment and helps us save money for future launches. During this session, you must design and test a Reusable Launcher for your Crew Exploration Vehicle that will journey to the Moon. Therefore, your goal will be to launch your CEV into an orbit around the Moon.



THE CHALLENGE:

To design and test a Reusable Launcher with the following constraints:

- 1. Launch the CEV to reach a goal of 5 meters. See the drawing on the page 123 for an idea of how to set up your launch.**
- 2. The Launcher must be reusable for each trial. If your rubber band breaks because it was pulled too far, it is not reusable for another launch.**
- 3. The Launcher must consist of an effective combination of rubber band type and how far back it should be pulled. You will experiment with three types of rubber bands and try three different lengths to pull those rubber bands back (think of a sling shot, but attached to a table).**
- 4. The Launcher must produce a repeatable outcome. If you set up the Launcher the same way twice, the CEV should travel the same distance both times. It is more important that the CEV is launched the same distance using the same setup than it is to get the CEV to travel the farthest distance.**

DESIGN challenge

To design and test a Reusable Launcher for the Crew Exploration Vehicle (CEV). The CEV should travel 5 meters when launched.

Launch Your CEV
Student page





Launch Set-Up

Use ruler or tape to measure how far the rubber band is pulled back.

Launcher goes here.

Target:
Moon

5 meters

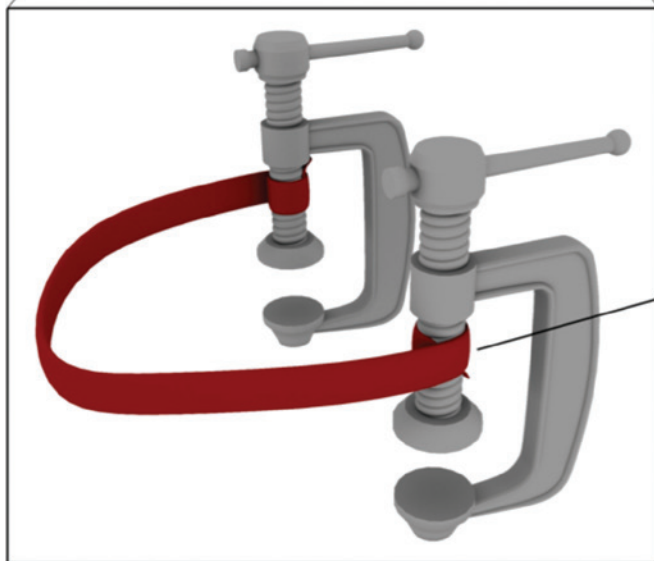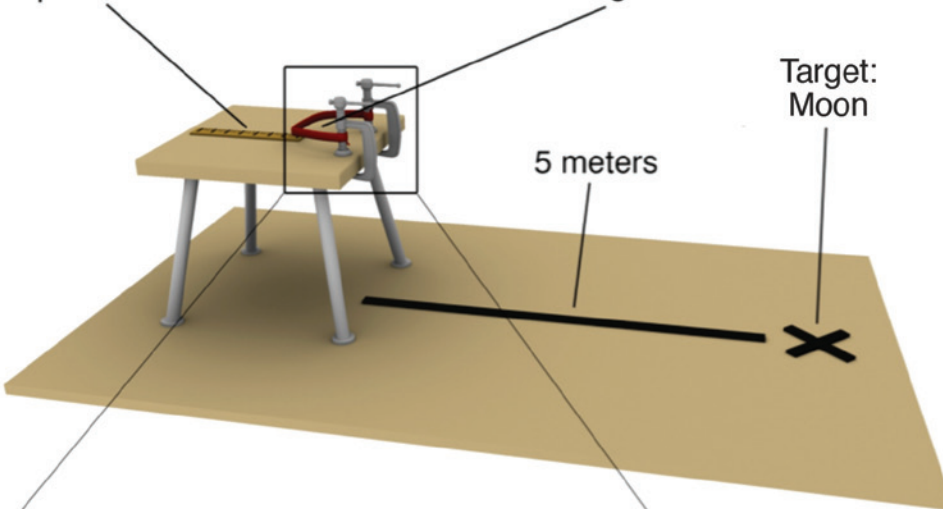

Clamp down or
wrap a rubber
band.

DESIGN challenge

To design and test a Reusable Launcher for the Crew Exploration Vehicle (CEV). The CEV should travel 5 meters when launched.

Launch Your CEV
Student page



Draw a picture of your team's Reusable Launcher with your CEV.

DESIGN challenge

To design and test a Reusable Launcher for the Crew Exploration Vehicle (CEV). The CEV should travel 5 meters when launched.

Launch Your CEV
Student page

Approved by: _____

ASK IMAGINE & PLAN


What questions do you have about today's challenge?

Describe the characteristics of the three rubber bands your team has chosen to use.

How will you test your rubber bands to see if they will work well as a "Reusable Launcher"?

Experiment & Record

Choose your three rubber bands and set up the Reusable Launcher for your experiment. Enter the independent variables into the table. Launch your CEV three times for each type of rubber band. Measure the dependent variables – how far your CEV travelled and how much it missed the 5 m target. Record your data.

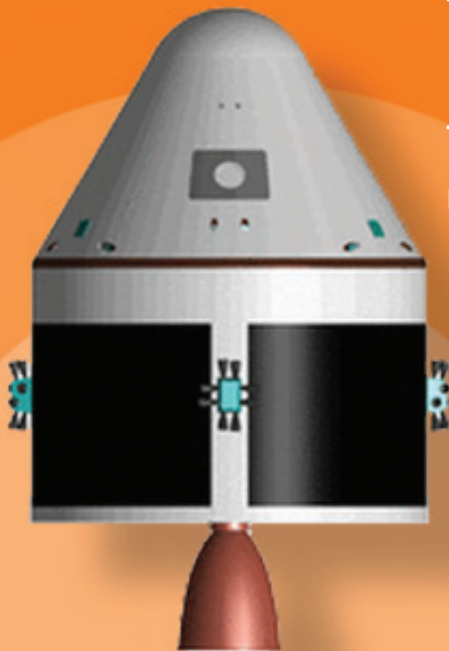


CEV Launch Data Table

Trial	Independent Variables		Dependent Variables	
	Type of rubber band (description)	Rubber band pulled length (cm)	Distance traveled (m)	Distance from target (m)
1				
2				
3				
1				
2				
3				
1				
2				
3				


Launch Your CEV
Student page

Did you get a repeatable outcome? If not, how will you improve your design to get consistent results?

Use the data recorded to make a line graph to show your results. The x-axis is the *independent variable* and the y-axis is the *dependent variable*. Label each axis with its measured units, and make tick marks on the graph with numbers so that you will be able to plot your data. Plot three sets of data, using a different color for each type of rubber band.



From your graph, can you determine if there is a relationship between the distance the rubber band is pulled and the distance that your CEV traveled? If so, describe that relationship.



QUALITY ASSURANCE FORM

Each team is to review another team's design and model, then answer the following questions.

Name of team reviewed: _____

What was the dependent variable tested by the team? _____

Did the launcher successfully send the CEV 5 meters out?

If no, what was the distance accomplished by the launcher?

Describe the rubber band that was used in the launcher.

Did the CEV sustain any damages from the launch?


List the specific strengths of the design.


List the specific weaknesses of the design:

How would you improve the design?

Inspected by: _____

Fun with Engineering at Home

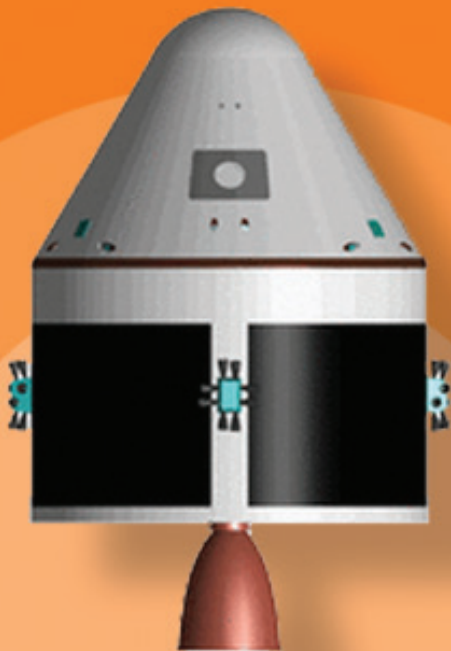

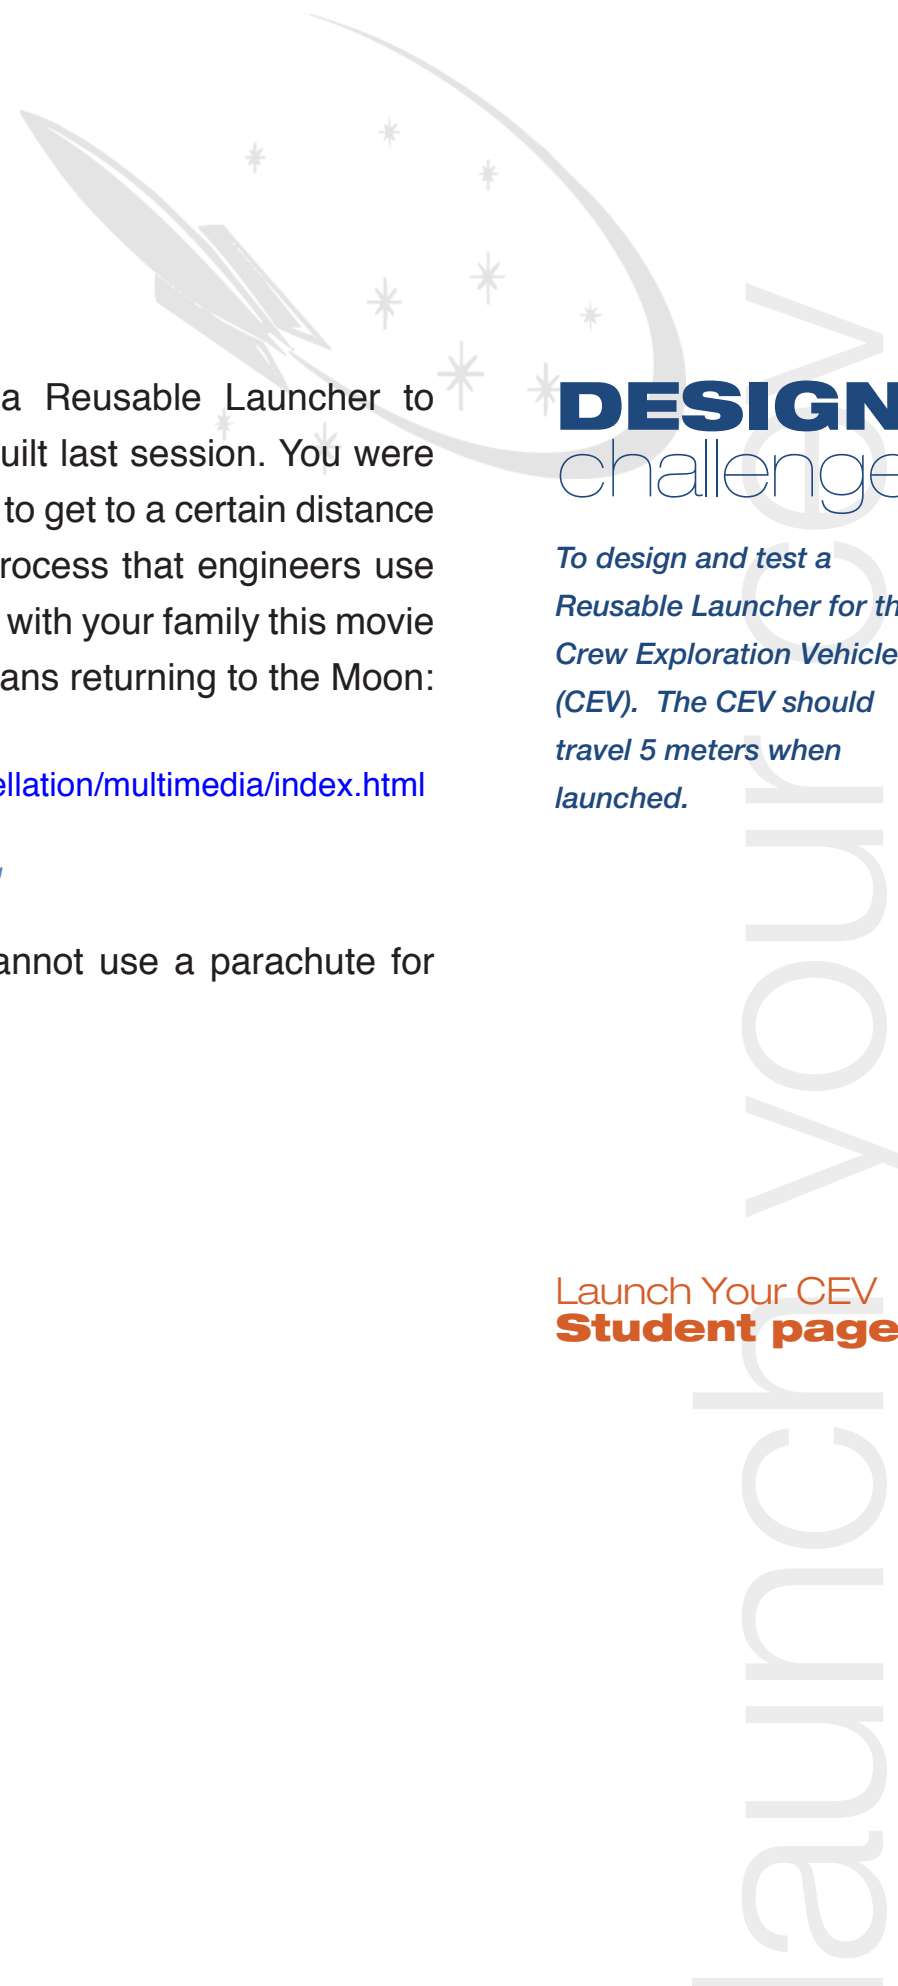

Today you designed and built a Reusable Launcher to launch the CEV model that you built last session. You were designing the Reusable Launcher to get to a certain distance (5-meters). You used the same process that engineers use when they build something. Share with your family this movie and have a discussion about humans returning to the Moon:

www.nasa.gov/mission_pages/constellation/multimedia/index.html

YOU BE THE TEACHER!

Explain to your family why we cannot use a parachute for landing on the Moon.

DESIGN challenge

To design and test a Reusable Launcher for the Crew Exploration Vehicle (CEV). The CEV should travel 5 meters when launched.

Launch Your CEV
Student page

